

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 March 2005 (03.03.2005)

PCT

(10) International Publication Number
WO 2005/019511 A1

(51) International Patent Classification⁷: **D01F 9/127**

(21) International Application Number:
PCT/JP2004/012676

(22) International Filing Date: 26 August 2004 (26.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-301546 26 August 2003 (26.08.2003) JP
60/499,367 3 September 2003 (03.09.2003) US
2004-014512 22 January 2004 (22.01.2004) JP

(71) Applicant (for all designated States except US): **SHOWA DENKO K. K.** [JP/JP]; 13-9, Shibadaimon 1-chome, Minato-ku, Tokyo 1058518 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KAMBARA, EIJI**

[JP/JP]; c/o Corporate R & D Center (Kawasaki), Showa Denko K. K., 5-1, Ogimachi, Kawasaki-ku, Kawasaki-shi, Kanagawa 2100867 (JP). **TSUJI, Katsuyuki** [JP/JP]; c/o Corporate R & D Center (Kawasaki), Showa Denko K. K., 5-1, Ogimachi, Kawasaki-ku, Kawasaki-shi, Kanagawa 2100867 (JP).


(74) Agents: **AOKI, Atsushi** et al.; A. Aoki, Ishida & Associates, Toranomon 37 Mori Bldg., 5-1, Toranomon 3-chome, Minato-ku, Tokyo 1058423 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


[Continued on next page]

(54) Title: **CRIMPED CARBON FIBER AND PRODUCTION METHOD THEREOF**

A

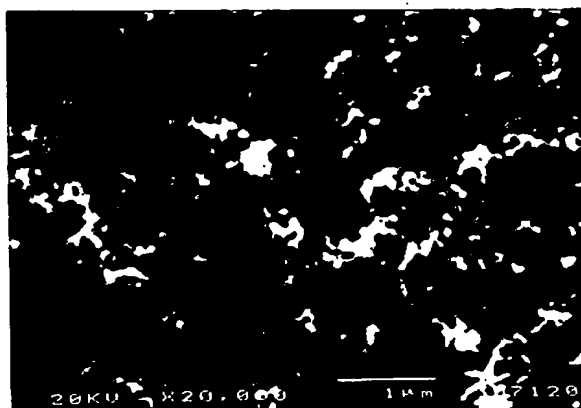

B

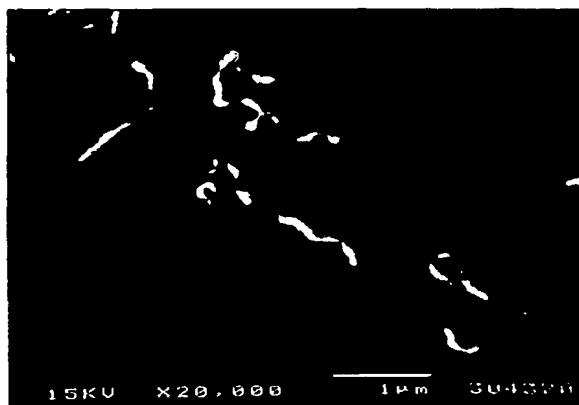

(57) Abstract: A crimped carbon fiber having a multilayer structure comprising a hollow structure in the inside, with the inner layer part having a carbon structure containing a herringbone structure and the outer layer part having a carbon structure differing from the carbon structure of the inner layer part. A method for producing a crimped carbon fiber, comprising contacting a carbon source and/or a catalyst source with a sulfur source in a heating zone to produce a vapor grown carbon fiber, wherein the ratio of the molar number of sulfur atom in the sulfur source to the molar number of the catalyst metal atom is 2.0 or more.

WO 2005/019511 A1

BEST AVAILABLE COPY

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

— *with international search report*